


**KAWASAKI '07-'08 & '09-'14 ZX-6R / '08-'10 ZX-10R**  
**DIY RUBBER TRANSFER**

Thank you for purchasing a Zero Gravity saddle. This instruction will give you an in-depth look at the rubber stop transferring process. Please read below. To receive further assistance please go to [www.zerogravity-racing.com/seats.php](http://www.zerogravity-racing.com/seats.php) and click onto installation.

**Warning:** To insure proper location remove and install one at a time in the same location installed on your OEM seat.

**Helpful hints:** Use metric tools, clean hands, put the bike on a stand. To avoid rubber damage and to make the removal and install much easier apply aerosol lubricant such as WD-40 to rubber stops surface facing the seat.

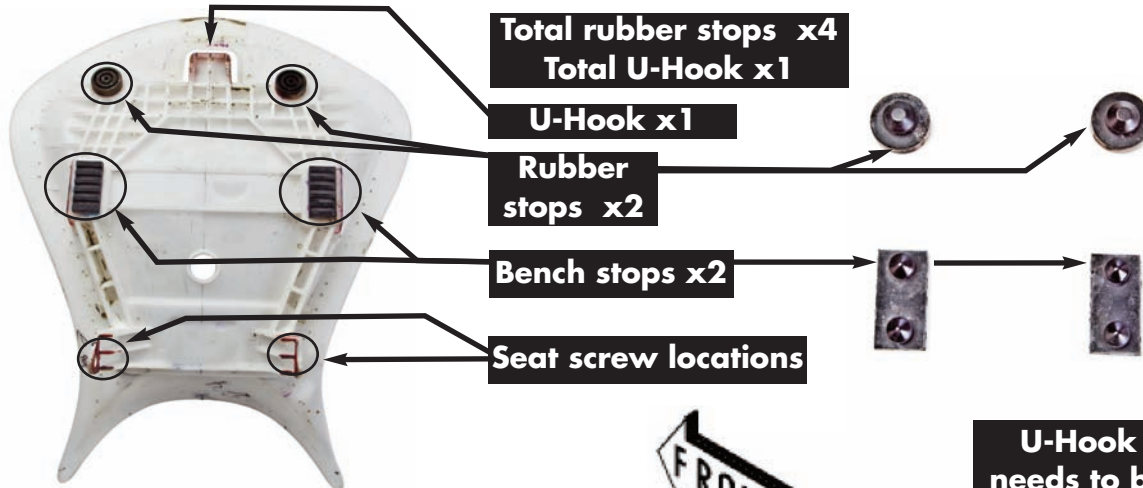

**Mounting Your Zero Gravity Saddle**

1. Remove the original saddle and save the factory seat screws and rubber stops from your OEM seat.
2. Install all OEM rubber stops onto your Zero Gravity® saddle as shown above in the same way they were installed on your OEM seat. The U-hook needs to be in place first from the back and bolted in towards the tank.
3. Position your Zero Gravity® saddle onto your bike chassis and push into place as you would the OEM seat. Install the original seat screws once the saddle is properly aligned.



**LATIGO™**  
**SERIES**

